

For comfort and performance


• Designed for radial cut sails from 28 to 48 feet

CDX laminates are engineered for durability and cruising performance. We have designed the CDX Pro range around a series of sub-assemblies using different weights of taffetas and a 500 denier polyester cross-ply. These sub-assemblies are combined one with another and a 6000 dpi polyester insertion to create a complimentary range of styles stepping up in weight and strength.

TiO2 in the adhesive adds to UV resistance and a robust anti-mildew additive provides advanced protection against mildew. We have also made a big improvement in the weight of the CDX Pro styles to make the fabrics more efficient in terms of strength to weight which will improve lower wind range performance and ease of handling.





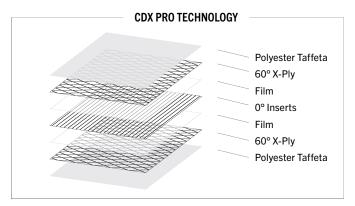

APPLICATIONS CDX PRO CRUISING LAMINATES

BOAT LENGTH		MAINSAIL		FURLING	
IN FT	IN M	MULTIHULL	MONOHULL	100%	135%
± 28	± 8	CDX7	CDX Pro 6	CDX Pro 6	CDX Pro 6
± 32	± 10	CDX7	CDX Pro 7	CDX Pro 7	CDX Pro 7
± 36	± 11	CDX9	CDX Pro 7/9	CDX Pro 9	CDX Pro 7
± 40	± 12	CDX9/11	CDX Pro 9	CDX Pro 11	CDX Pro 9
± 44	± 13	CDX11	CDX Pro 11	CDX Pro 11	CDX Pro 11
± 48	± 14	CDX11	CDX Pro 11	CDX Pro 11	CDX Pro 11